







■ 运输部件

序号	名称	形状	L(m)	B(m)	H(m)	单件重量 (t)	数量
1	臂架Ⅰ		10.39	1.64	2.51	4.03	1
2	臂架Ⅱ		10.07	1.46	2.48	2.93	1
3	臂架Ⅲ		10.05	1.46	2.12	2.27	1
4	臂架Ⅳ		5.05	1.46	2.44	1.00	1
5	臂架Ⅴ		10.25	1.46	2.14	1.59	1
6	臂架Ⅵ		5.01	1.46	1.94	0.73	1
7	臂架Ⅶ		10.02	1.46	1.92	1.05	1
8	臂架Ⅷ		5.01	1.46	1.88	0.42	1
9	臂架Ⅸ		10.05	1.46	1.87	0.65	1
10	臂端节		1.68	0.58	1.36	1.62	1
11	吊钩		1.85	0.25	1.86	0.65	1
12	爬升架		7.66	3.11	2.56	4.16	1
13	回转总成		5.66	2.84	3.36	7.14	1
14	变幅小车		4.05	2.36	1.32	0.83	1
15	四方臂组件 + 拉杆Ⅰ		6.89	1.65	2.49	3.05	1
16	四方臂组件 + 拉杆Ⅱ		11.7	1.66	3.47	4.28	1
17	片式标准节		3.53	2.21	0.70	1.45	13
18	片式标准节		3.53	2.21	0.70	1.80	3
19	起升机构		1.99	1.95	1.25	3.10	1
20	过渡节总成		2.62	2.62	2.46	1.87	1
21	转换节总成		2.11	2.11	3.26	1.82	1
22	塔头总成		2.55	1.68	2.54	2.63	1



湖南三一塔式起重机械有限公司

中国湖南长沙金洲开发区金洲大道168号 邮编Zip: 410600
售后服务热线Service: 400 887 8318 咨询投诉电话Consulting: 139 7491 0127(高先生)
邮箱Email: gaopy@sany.com.cn

温馨提示：
由于技术不断更新,技术参数及配置如有更改,恕不另行通知。图片上的机器可能包括附加设备,本画册仅供参考,以实物为准。
版权为三一重工所有,未经三一重工书面许可,本目录任何部分的内容不得被复制或抄袭用于任何目的。

© 中国印刷 2021 年 11 月版




SFT315C2(T7527-16)

SANY TOWER CRANE
QUALITY CHANGES THE WORLD

三一重工塔式起重机




■ 臂长组合及吊重（支腿固定式）

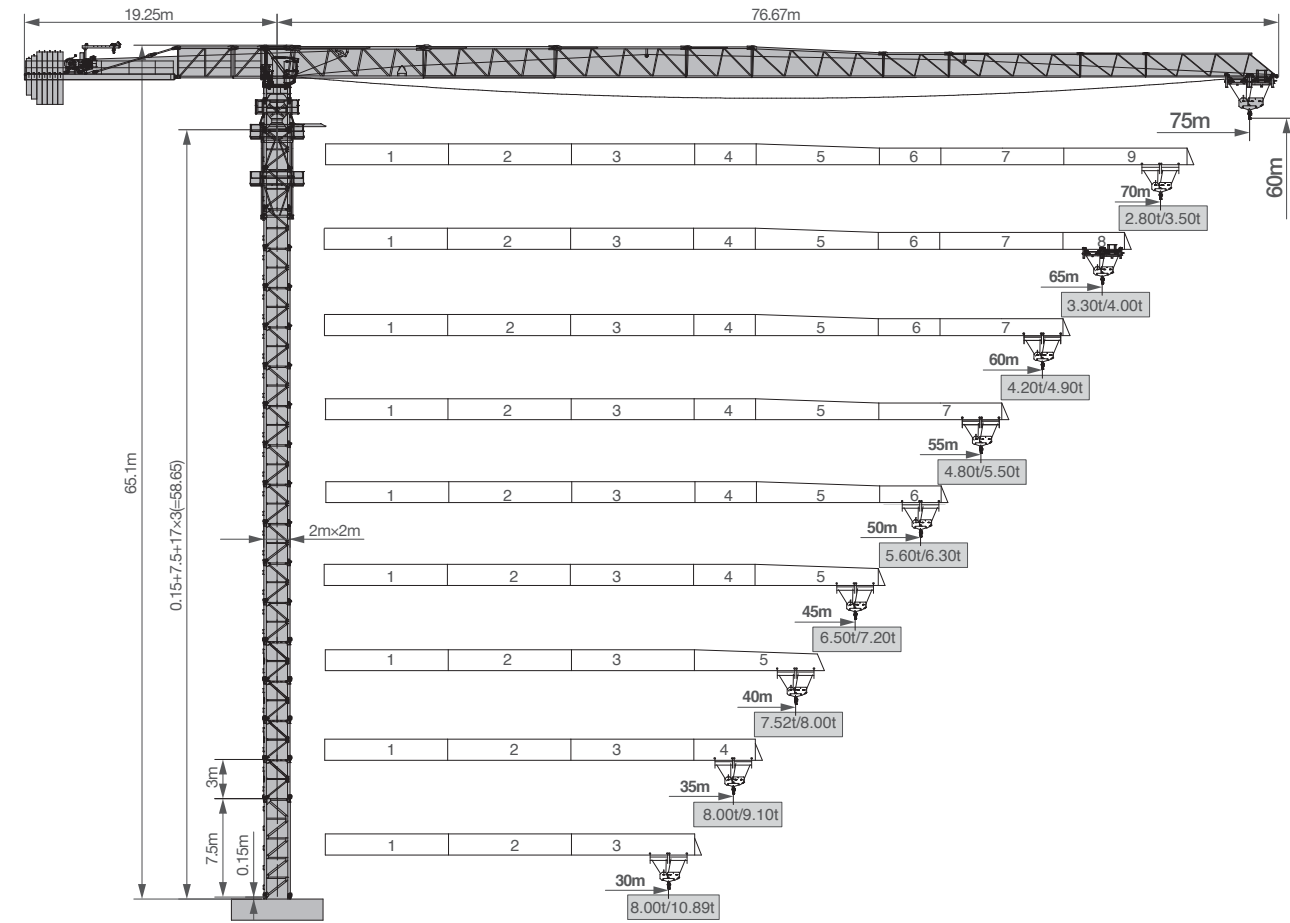

■ 平衡重组合表

起重臂臂长 (m)	平衡重总重 (kg)	4000kg 配重块	3400kg 配重块	1700kg 配重块
75	25100	5	1	1
70	23400	5	1	0
65	23400	5	1	0
60	23400	5	1	0
55	21700	5	0	1
50	21700	5	0	1
45	19400	4	1	0
40	17100	3	1	1
35	16000	4	0	0
30	13700	3	0	1


■ 塔身

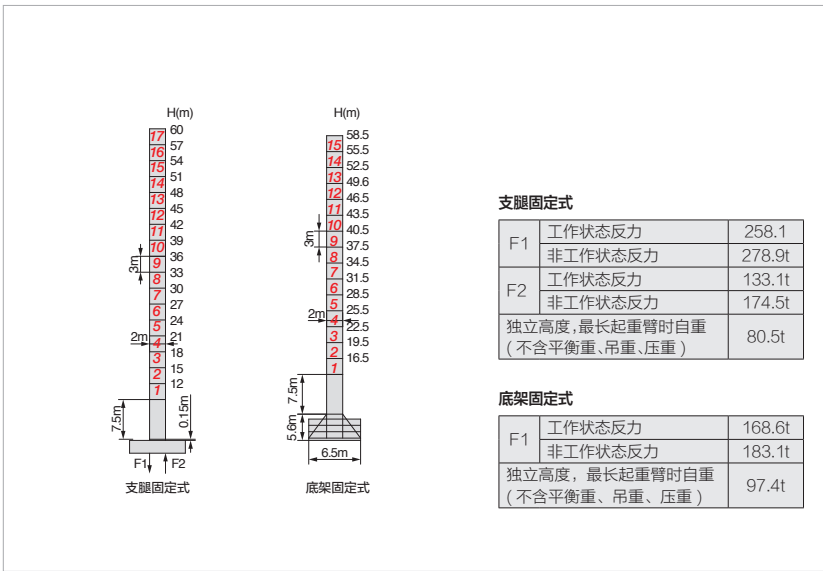

■ 起重特性表

幅度 (m)	最大起重重	18	20	23	25	28	30	33	35	38	40	43	45	48	50	53	55	58	60	63	65	68	70	73	75
75	4.5-31.35/8t	8.00						7.52	7.02	6.37	6.00	5.50	5.20	4.81	4.57	4.25	4.06	3.80	3.64	3.41	3.27	3.08	2.97	2.80	2.70
	3.5-16.70/16t	14.39	12.69	10.72	9.68	8.42	7.71	6.84	6.33	5.68	5.31	4.81	4.51	4.12	3.88	3.56	3.37	3.11	2.94	2.72	2.58	2.40	2.28	2.11	2.00
70	4.5-34.90/8t	8.00						7.97	7.27	6.86	6.31	6.00	5.55	5.29	4.94	4.72	4.43	4.25	4.00	3.84	3.63	3.50			
	3.5-17.80/16t	15.72	13.98	11.94	10.85	9.51	8.76	7.82	7.27	6.57	6.15	5.61	5.28	4.85	4.59	4.23	4.02	3.72	3.54	3.30	3.14	2.93	2.80		
65	4.5-36.00/8t	8.00								7.54	7.11	6.55	6.21	5.76	5.50	5.13	4.91	4.60	4.42	4.16	4.00				
	3.5-18.60/16t	16.00	14.50	12.38	11.26	9.87	9.10	8.12	7.56	6.83	6.41	5.84	5.51	5.06	4.79	4.42	4.20	3.90	3.71	3.46	3.30				
60	4.5-39.30/8t	8.00								7.84	7.22	6.86	6.37	6.08	5.68	5.43	5.10	4.90							
	3.5-20.00/16t	16.00	16.00	13.65	12.42	10.91	10.07	9.00	8.40	7.60	7.14	6.52	6.15	5.67	5.37	4.97	4.73	4.40	4.20						
55	4.5-39.68/8t	8.00								7.93	7.31	6.94	6.44	6.15	5.74	5.50									
	3.5-20.20/16t	16.00	16.00	13.81	12.57	11.04	10.20	9.14	8.50	7.69	7.23	6.60	6.24	5.74	5.44	5.04	4.80								
50	4.5-40.80/8t	8.00									7.58	7.20	6.61	6.30											
	3.5-21.30/16t	16.00	16.00	14.58	13.22	11.55	10.64	9.47	8.83	8.00	7.52	6.88	6.50	5.91	5.60										
45	4.5-40.80/8t	8.00									7.58	7.20													
	3.5-21.30/16t	16.00	16.00	14.58	13.22	11.55	10.64	9.47	8.83	8.00	7.52	6.88	6.50												
40	4.5-40.00/8t	8.00																							
	3.5-21.30/16t	16.00	16.00	14.58	13.22	11.55	10.64	9.47	8.83	8.00	7.52														
35	4.5-35.00/8t	8.00																							
	3.5-21.35/16t	16.00	16.00	14.72	13.41	11.80	10.89	9.75	9.10																
30	4.5-30.00/8t	8.00																							
	3.5-21.35/16t	16.00	16.00	14.72	13.41	11.80	10.89																		

■ 附着

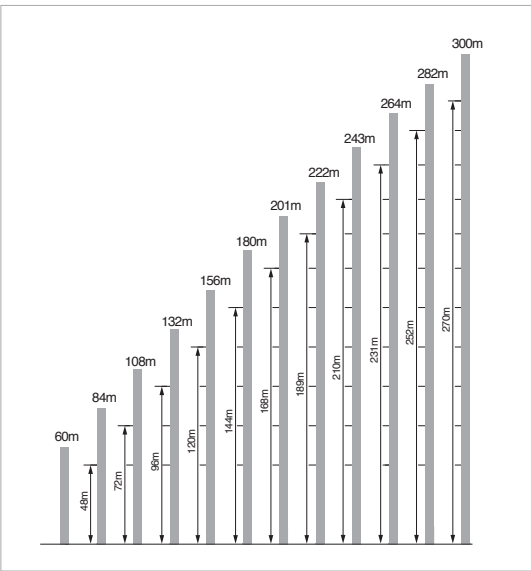

■ 传动机构

	型号	功率	速度
回转	YPWEF132M1-4F1 YPWEF132M1-4F2	2×7.5kW	0~0.7r/min
变幅	SXJ75.70P	7.5kW	0~75m/min
起升	55QP40	55kW(33Hz)	0~100m/min
电源电压	380V(±10%)	电源频率	50HZ

注：工作容绳量大于 600m 时请与厂家联系

■ 起重性能曲线图

