















■ 运输部件

序号	名称	形状	L(m)	B(m)	H(m)	单件重量 (t)	数量
1	臂架Ⅰ		10.225	1.150	2.323	1.571	1
2	臂架Ⅱ		10.095	1.135	2.102	0.981	1
3	臂架Ⅲ		10.165	1.135	1.735	0.831	1
4	臂架Ⅳ		5.052	1.135	1.707	0.354	1
5	臂架Ⅴ		10.095	1.135	1.702	0.588	1
6	臂架Ⅵ		5.123	1.135	1.697	0.306	1
7	臂架Ⅶ		10.123	1.135	1.712	0.557	1
8	臂端节		1.135	0.146	1.889	0.091	1
9	平衡臂节		11.764	1.456	0.748	1.613	1
10	回转总成		4.598	2.642	2.838	3.887	1
11	过渡节总成		2.154	2.154	2.80	1.067	1
12	爬升架		6.600	2.282	2.024	2.090	1
13	标准节		2.800	1.763	1.763	0.848	13
14	基础节		2.825	1.919	1.919	1.005	1
15	小车		2.030	1.912	1.206	0.294	1
16	吊钩		1.055	0.254	1.538	0.296	1
17	司机室		2.280	1.410	2.180	0.358	1
18	起升机构		1.860	1.521	0.929	1.501	1
19	变幅机构		1.130	0.560	0.703	0.482	1
20	底架支撑节 (底架行走式用)		2.800	2.100	2.100	0.950	1
21	底架支座 (底架行走式用)		5.550	0.400	1.960	1.550	1
22	行走机构 (底架行走式用)		1.250	1.350	1.000	0.750	4



湖南三一塔式起重机械有限公司

中国湖南长沙金洲开发区金洲大道168号 邮编Zip: 410600
售后服务热线Service: 400 887 8318 咨询投诉电话Consulting: 139 7491 0127(高先生)
邮箱Email: gaopy@sany.com.cn

温馨提示：
由于技术不断更新,技术参数及配置如有更改,恕不另行通知。图片上的机器可能包括附加设备,本画册仅供参考,以实物为准。
版权为三一重工所有,未经三一重工书面许可,本目录任何部分的内容不得被复制或抄袭用于任何目的。

© 中国印刷 2022 年 8 月版




三一塔机 抖音号




三一塔机 工厂服务号



■ 臂长组合及吊重（螺栓固定式）

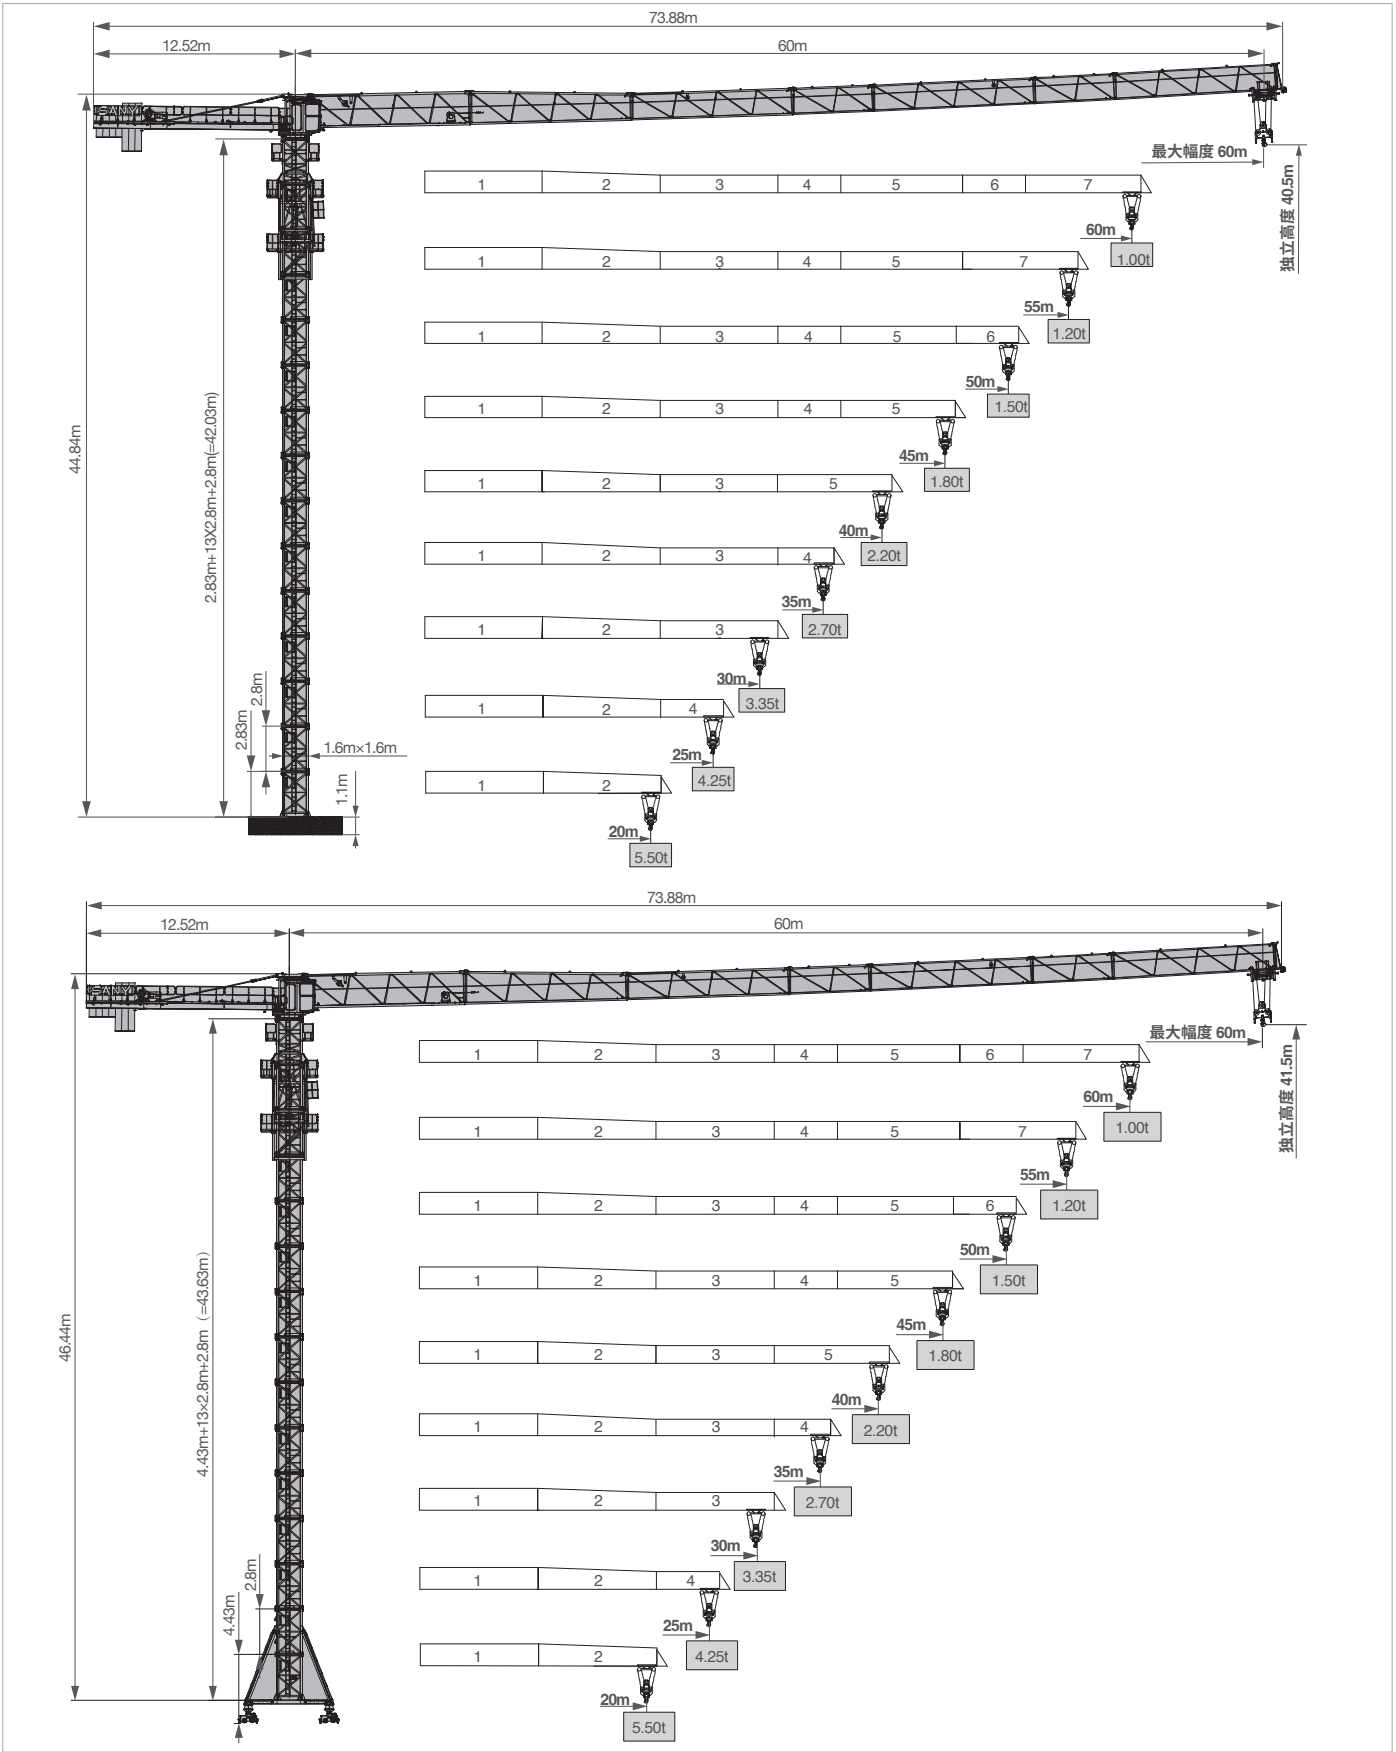


■ 塔身

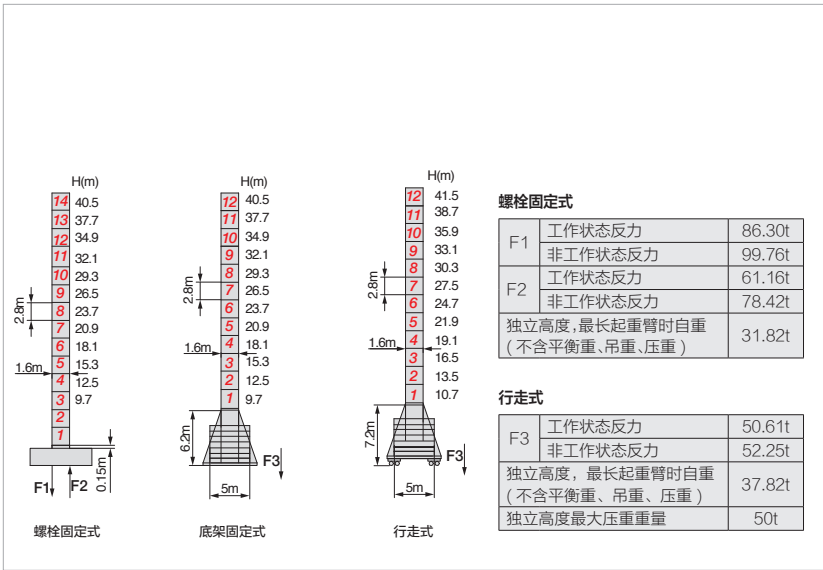

■ 起重特性表

幅度 (m)	最大起重量	15	18	20	22	25	28	30	32	35	38	40	42	45	48	50	52	55	58	60
60	2.5-27.60/3t		3.00			2.89	2.70	2.46	2.25	1.95	1.85	1.68	1.57	1.41	1.35	1.22	1.15	1.03	1.00	
	2.5-15.50/6t	6.00	4.94	4.45	3.86	3.40	2.84	2.65	2.41	2.20	1.89	1.80	1.63	1.52	1.35	1.30	1.16	1.10	0.98	0.95
55	2.5-28.20/3t		3.00			2.79	2.51	2.29	2.02	1.92	1.75	1.63	1.46	1.40	1.30	1.20				
	2.5-15.70/6t	6.00	5.06	4.55	3.92	3.45	2.94	2.74	2.45	2.24	1.97	1.87	1.69	1.58	1.41	1.35	1.22	1.15		
50	2.5-29.70/3t		3.00			2.98	2.68	2.45	2.17	2.06	1.88	1.76	1.56	1.50						
	2.5-16.50/6t	6.00	5.42	4.88	4.18	3.68	3.14	2.93	2.63	2.40	2.12	2.01	1.83	1.71	1.51	1.45				
45	2.5-30.40/3t		3.00			2.77	2.53	2.24	2.13	1.93	1.80									
	2.5-16.90/6t	6.00	5.50	4.95	4.30	3.78	3.21	3.00	2.71	2.48	2.20	2.08	1.88	1.75						
40	2.5-31.50/3t		3.00			2.88	2.63	2.32	2.20											
	2.5-17.50/6t	6.00	5.69	5.12	4.45	3.92	3.35	3.13	2.82	2.58	2.26	2.15								
35	2.5-32.30/3t		3.00			2.70														
	2.5-18.10/6t	6.00	5.28	4.58	4.03	3.46	3.23	2.90	2.65											
30	2.5-30.00/3t		3.00																	
	2.5-18.50/6t	6.00	5.40	4.72	4.15	3.59	3.35													
25	2.5-25.00/3t		3.00																	
	2.5-19.30/6t	6.00	5.55	4.83	4.25															
20	2.5-20.00/3t		3.00																	
	2.5-19.50/6t	6.00	5.50																	

■ 附着

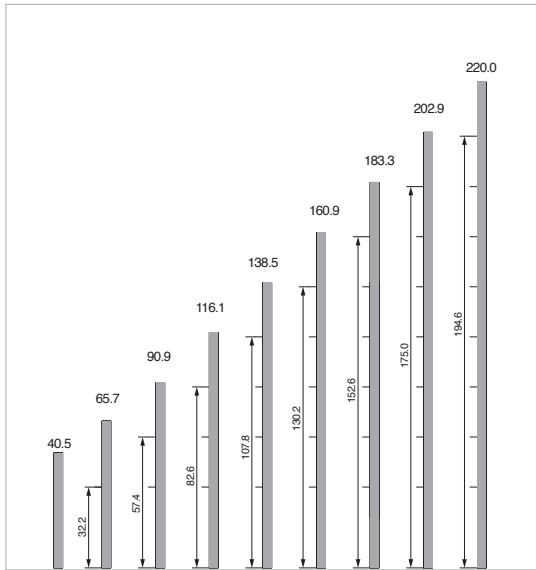

■ 传动机构

		型号	功率	速度
回转	↻	YPWEF132M2L-6F1	7.5kW	0~0.6r/min
变幅	↔	SXJ33.62P	4.0kW	0~80m/min
起升	↕	自制	24kW	0~110m/min
行走	↔	RT443	5.2kW	0~25m/min
电源电压		380V(±10%)	电源频率	50HZ

注：工作容绳量大于 460m 时请与厂家联系

■ 平衡重组合表

起重臂臂长 (m)	平衡重总重 (kg)	2500kg 配重块	1400kg 配重块
60	13100	3	4
55	11700	3	3
50	10600	2	4
45	9200	2	3
40	8900	3	1
35	7800	2	2
30	6700	1	3
25	5300	1	2
20	5000	2	0

■ 起重性能曲线图

