






















■ 运输部件

序号	名称	形状	L(m)	B(m)	H(m)	单件重量 (t)	数量
1	臂架Ⅰ		10.24	1.315	2.56	2.281	1
2	臂架Ⅱ		5.27	1.135	2.38	0.900	1
3	臂架Ⅲ		10.20	1.135	2.35	1.446	1
4	臂架Ⅳ		10.18	1.135	2.32	1.079	1
5	臂架Ⅴ		10.16	1.135	1.92	0.913	1
6	臂架Ⅵ		5.17	1.135	1.89	0.395	1
7	臂架Ⅶ		5.13	1.135	1.88	0.332	1
8	臂架Ⅷ		10.13	1.135	1.88	0.597	1
9	臂尖节		0.37	1.135	1.37	0.1	1
10	回转总成		5.126	2.895	3.115	4.354	1
11	平衡臂节 1		3.35	1.49	0.87	0.844	1
12	平衡臂节 2		11.58	1.54	0.92	2.542	1
13	爬升架		6.156	2.304	2.264	2.304	1
14	过渡节		2.83	2.43	2.43	1.351	1
15	标准节		2.8	1.96	1.96	0.930	12
16	加强节		2.8	1.96	1.96	1.049	4
17	基础节		5.63	2.13	2.13	2.098	1
18	小车		2.08	2.05	1.32	0.384	1
19	吊钩		1.16	0.34	1.78	0.389	1
20	司机室		2.28	1.41	2.18	0.805	1
21	起升机构		1.97	1.9	1.02	1.95	1
22	变幅机构		1.32	0.6	0.67	0.49	1
23	底架支撑节		2.8	2.3	2.3	1.15	1
24	底架支座		6.05	0.45	2.16	1.66	1
25	行走机构		1.25	1.35	1.0	0.75	4



湖南三一塔式起重机械有限公司

中国湖南长沙金洲开发区金洲大道168号 邮编Zip: 410600
售后服务热线Service: 400 887 8318 咨询投诉电话Consulting: 139 7491 0127(高先生)
邮箱Email: gaopy@sany.com.cn



温馨提示：
由于技术不断更新,技术参数及配置如有更改,恕不另行通知,图片上的机器可能包括附加设备,本画册仅供参考,以实物为准。
版权为三一重工所有,未经三一重工书面许可,本目录任何部分的内容不得被复制或抄袭用于任何目的。

© 中国印刷 2023 年 2 月版



H SERIES
SANY TOWER CRANE




■ 臂长组合及吊重（支腿固定式）

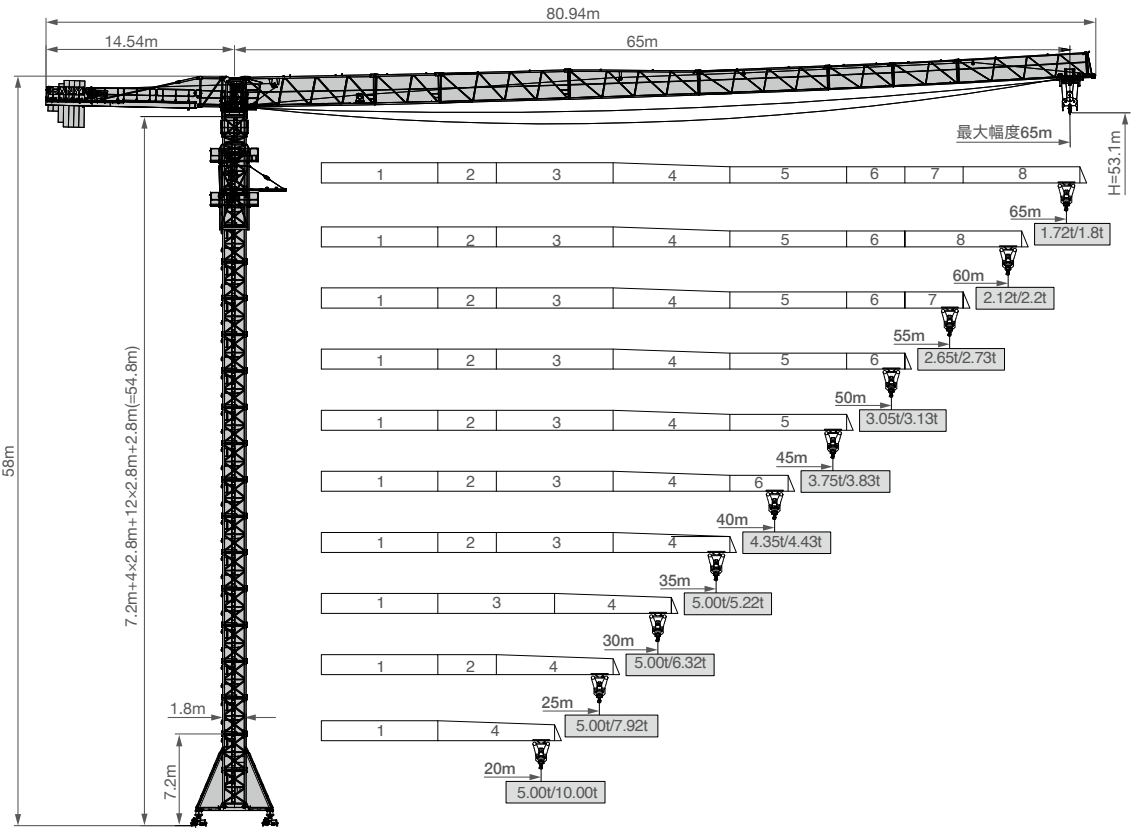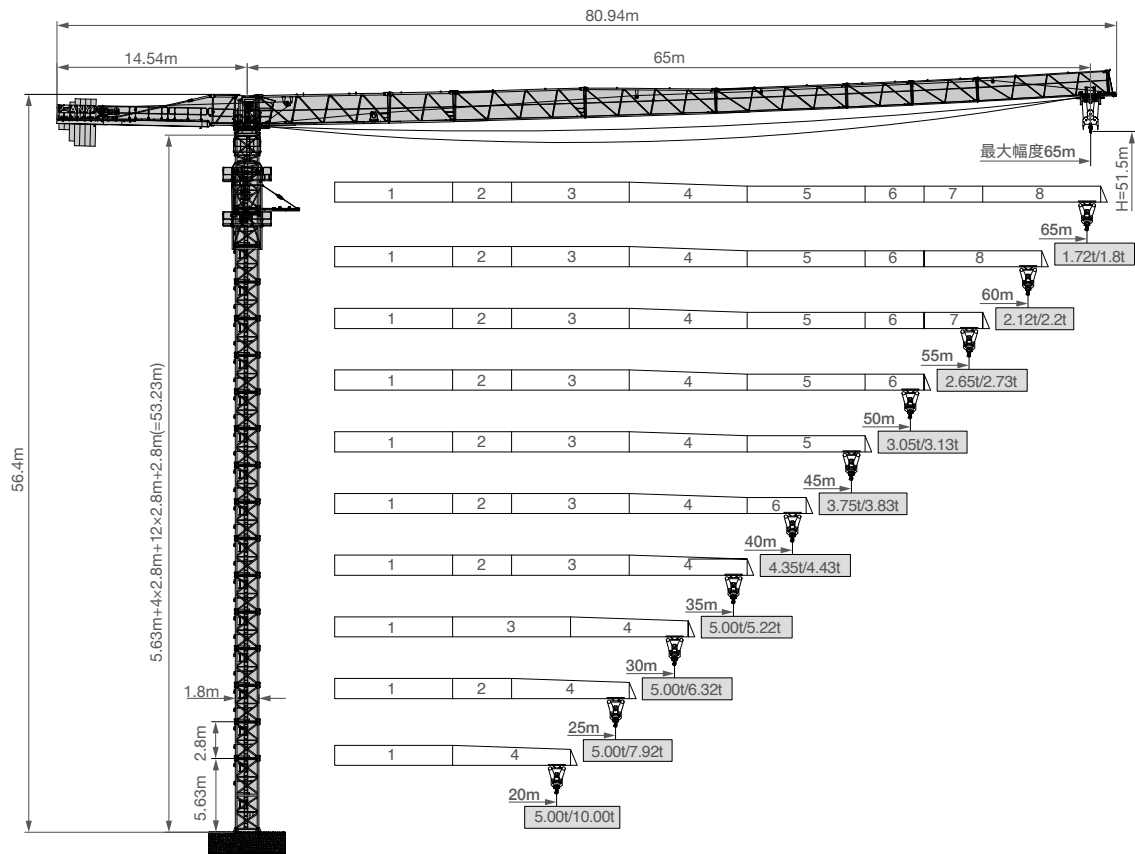


■ 平衡重组合表

起重臂臂长 (m)	平衡重总重 (kg)	3000kg 配重块	2500kg 配重块	1400kg 配重块
65	17300	4	1	2
60	15900	4	1	1
55	15900	4	1	1
50	14500	4	1	0
45	13400	4	0	1
40	12000	4	0	0
35	11500	3	1	0
30	9900	2	1	1
25	8500	2	1	0
20	7400	2	0	1

■ 塔身



■ 附着

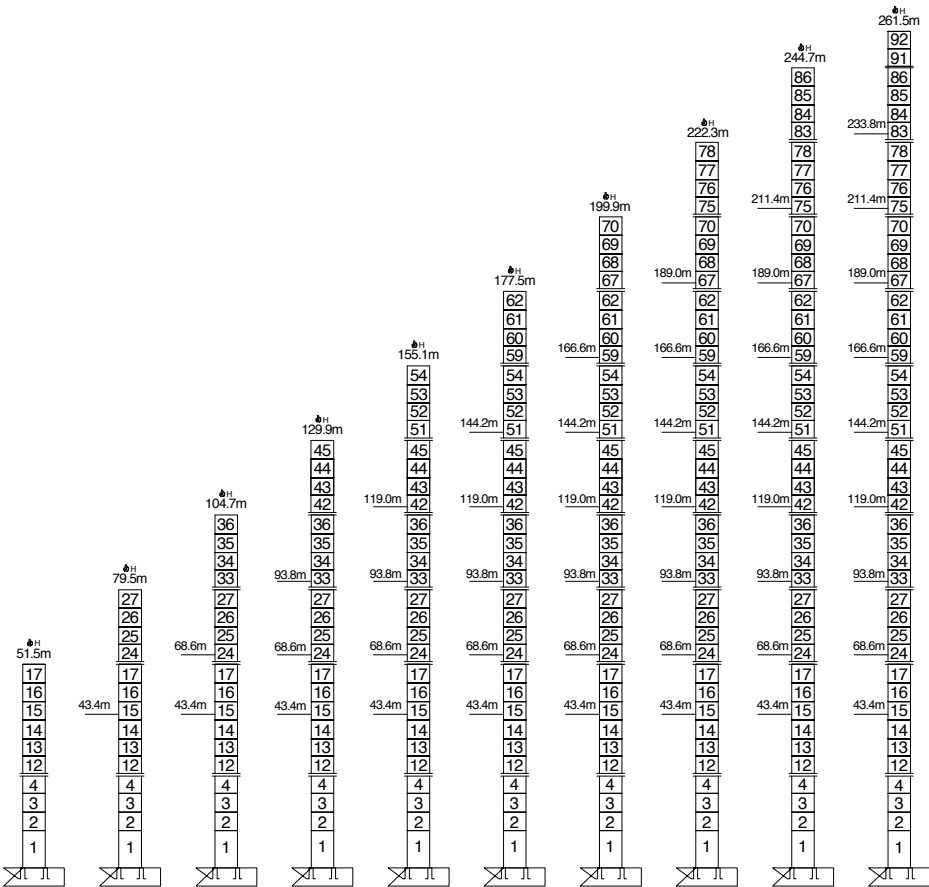

■ 起重特性表

幅度 (m)	最大起重重量	15	18	20	23	25	28	30	33	35	38	40	43	45	48	50	53	55	58	60	63	65
65	2.5-29.88m/5t	5.00						4.98	4.60	4.12	3.72	3.49	3.28	3.00	2.75	2.61	2.47	2.29	2.12	2.02	1.89	1.80
60	2.5-16.37m/10t	10.00	9.15	7.93	7.09	6.10	5.32	4.89	4.52	4.04	3.64	3.41	3.20	2.91	2.67	2.52	2.39	2.21	2.04	1.94	1.80	1.72
55	2.5-31.66m/5t	5.00						4.94	4.43	4.00	3.76	3.53	3.23	2.98	2.82	2.68	2.48	2.31	2.20			
50	2.5-17.32m/10t	10.00	9.74	8.47	7.59	6.53	5.70	5.25	4.85	4.35	3.92	3.67	3.45	3.15	2.89	2.74	2.59	2.40	2.22	2.12		
45	2.5-33.97m/5t	5.00						5.00	4.82	4.37	4.10	3.86	3.54	3.26	3.09	2.94	2.73					
40	2.5-18.56m/10t	10.00	9.18	8.22	7.09	6.20	5.71	5.29	4.74	4.28	4.02	3.78	3.46	3.18	3.01	2.86	2.65					
35	2.5-34.27m/5t	5.00						5.00	4.88	4.41	4.15	3.90	3.58	3.30	3.13							
30	2.5-18.72m/10t	10.00	9.27	8.31	7.16	6.27	5.77	5.34	4.79	4.33	4.06	3.82	3.50	3.22	3.05							
25	2.5-36.16m/5t	5.00						5.00	5.00	4.71	4.43	4.17	3.83									
20	2.5-19.73m/10t	10.00	9.85	8.83	7.62	6.67	6.15	5.70	5.12	4.63	4.34	4.09	3.75									
15	2.5-36.18m/5t	5.00						5.00	5.00	4.71	4.43											
10	2.5-19.74m/10t	10.00	9.85	8.83	7.62	6.68	6.16	5.70	5.12	4.63	4.35											
5	2.5-35.00m/5t	5.00						5.00	5.00													
0	2.5-20.05m/10t	10.00		8.99	7.76	6.80	6.27	5.81	5.22													
-5	2.5-30.00m/5t	5.00																				
-10	2.5-20.17m/10t	10.00		9.06	7.82	6.85	6.32															
-15	2.5-25.00m/5t	5.00																				
-20	2.5-20.39m/10t	10.00		9.17	7.92																	
-25	2.5-20.00m/5t	5.00																				
-30	2.5-20.00m/10t	10.00																				

■ 传动机构

	型号	功率	速度
回转	HPZ55.130.195-4F1 HPZ55.130.195-4F2	2x5.5kW	0~0.7r/min
变幅	SXJ55.70P	5.5kW	0~80m/min
起升	SQT37P33K127	37kW	0~110m/min
行走	RT443	5.2kW	0~25m/min
电源电压	380V(±10%)	电源频率	50HZ

注：工作容绳量大于 540m 时请与厂家联系

■ 起重性能曲线图

